


WHAT THE FIX?!

Opel / Vauxhall Astra J 2.0 CDTI

*FAULTY FUNCTION,
ENGINE ELECTRONICS
INDICATOR LIGHT HAS COME ON.*

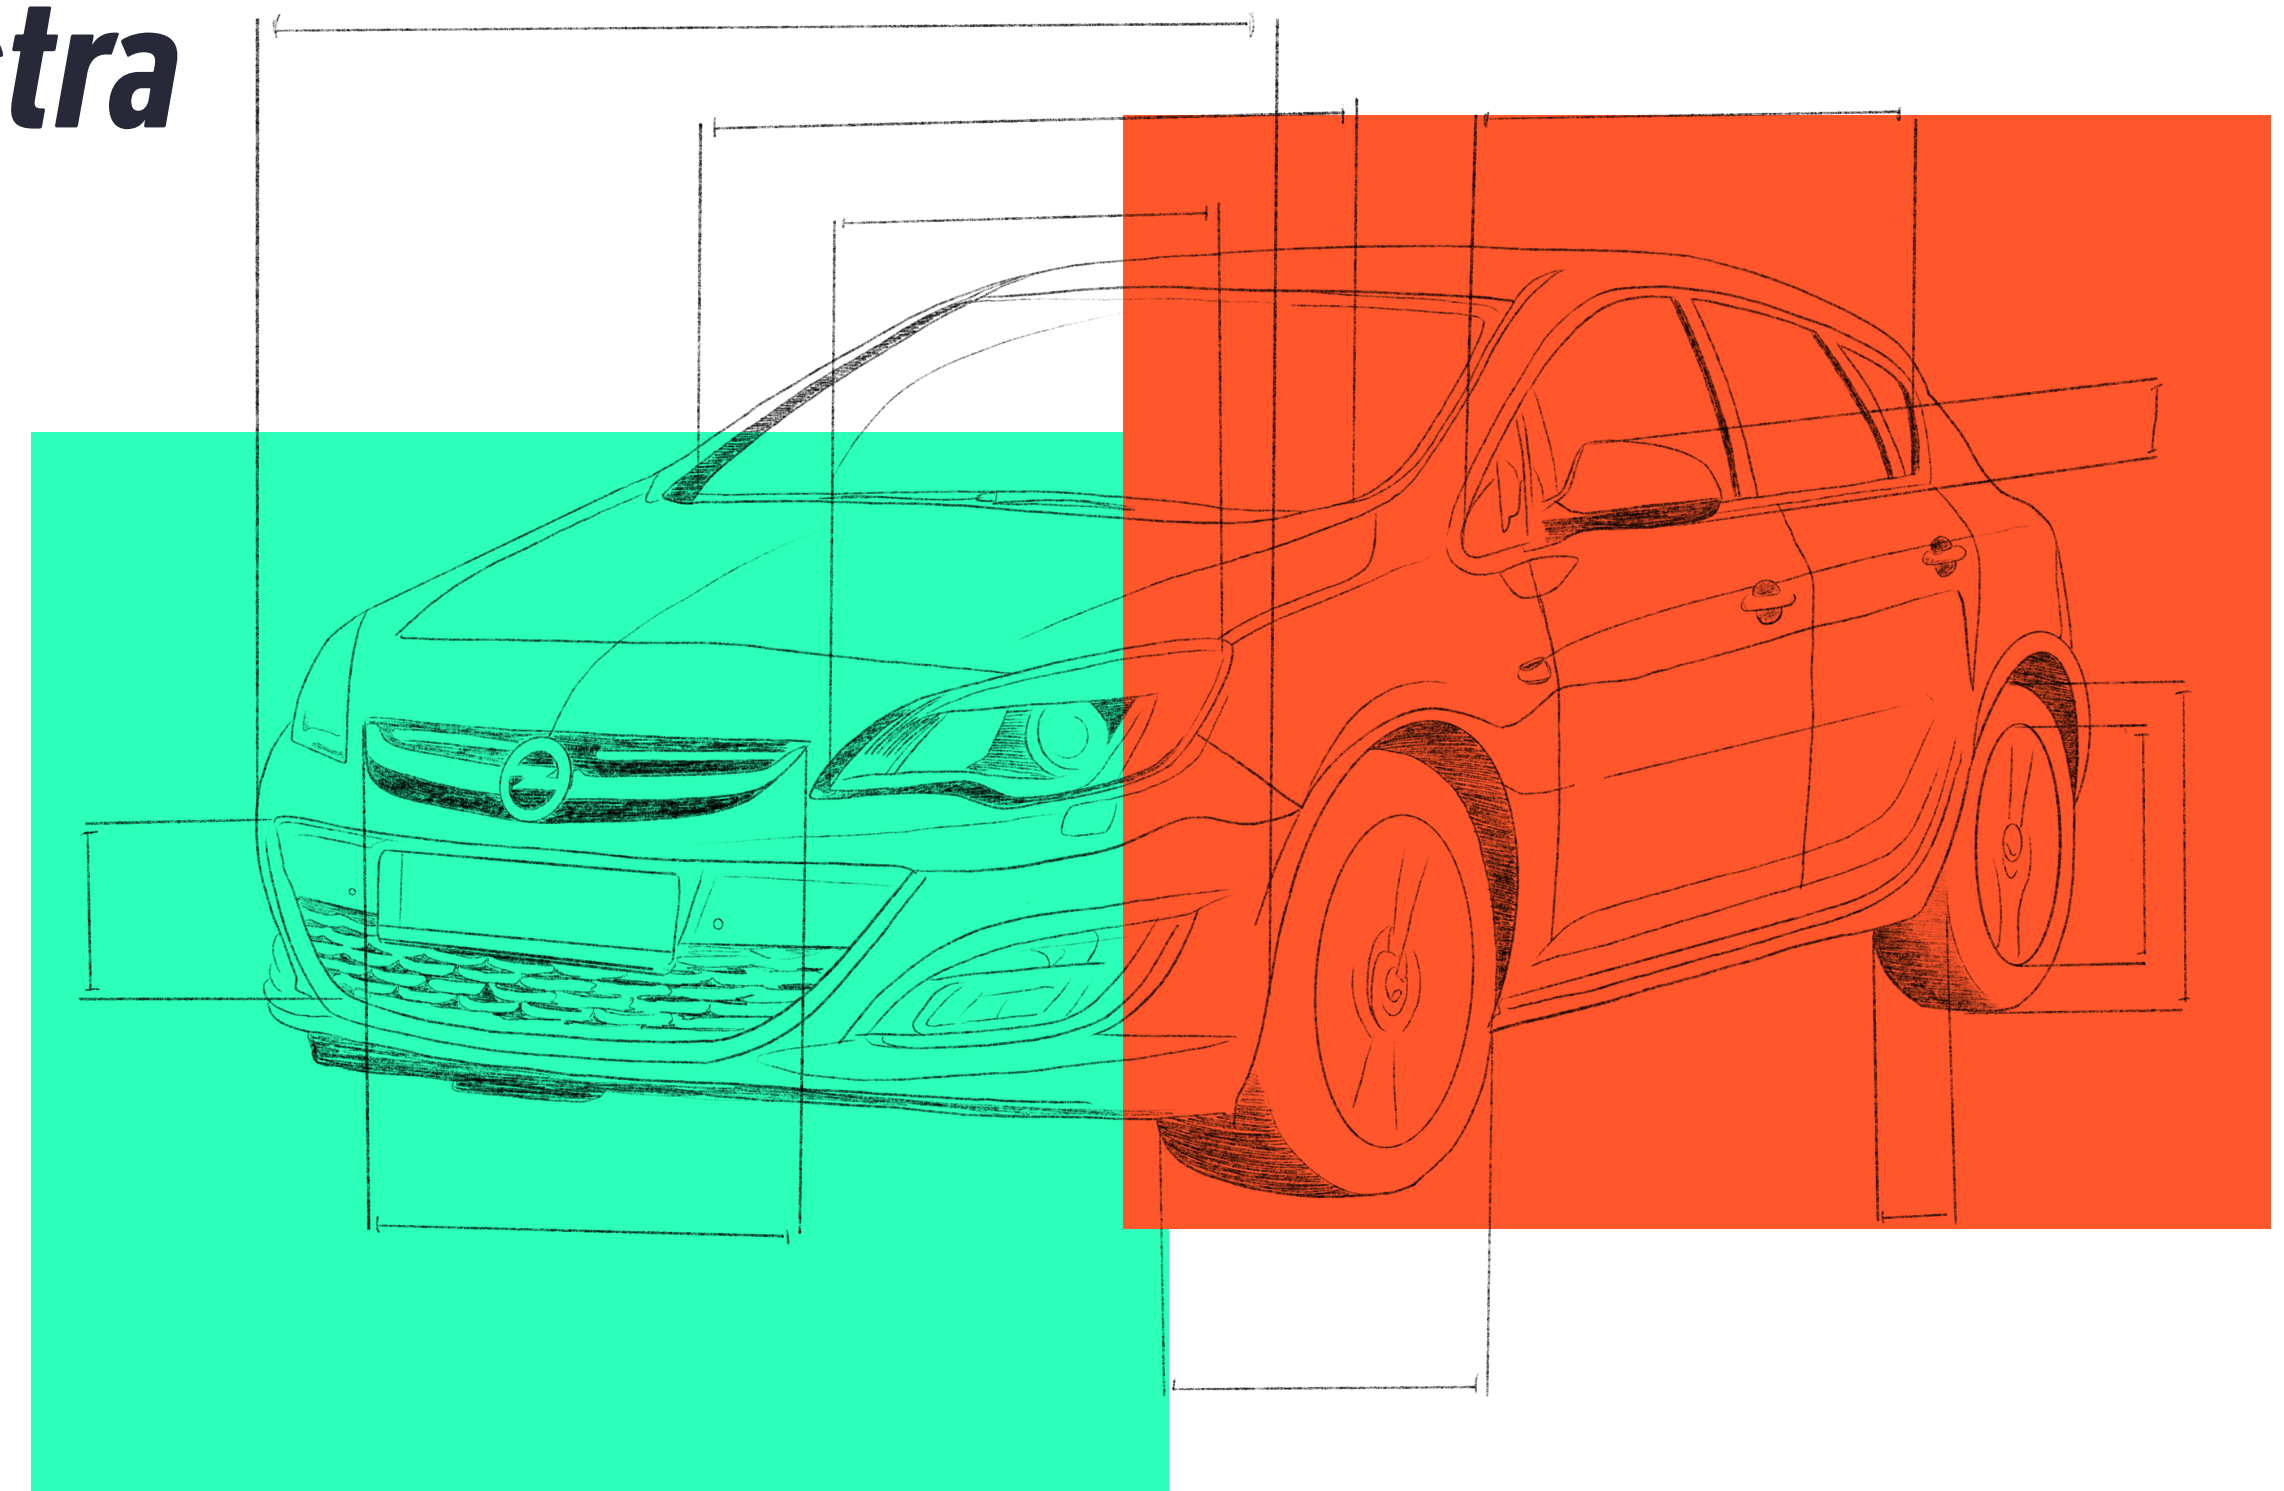

Model:

OPEL / Vauxhall ASTRA J 2.0 CDTI (P10)

Engine:

A20DTH

Trouble code:

P0480 (Radiator fan:
malfunction or cable interruption)

Technical background:

Resistance measurement between plug X1 PIN 39 WH/BK
in the fuse box and PIN 3 of the radiator fan is 1.5 mΩ.
Coupling station with an intermediate plug is installed on the left side member.

Fault symptoms:

- Radiator fan runs continuously every once in a while.
- Engine electronics indicator light is sporadically on.

Potential fix:

Check the electrical wiring for breaks between the fuse box,
the intermediate connector and the radiator fan and repair if necessary.